


Part No.	(6)Length	Part No.	(6)Length
3182A-1	1M	3182A-5	5M
3182A-2	2M	3182A-10	10M
3182A-3	3M		

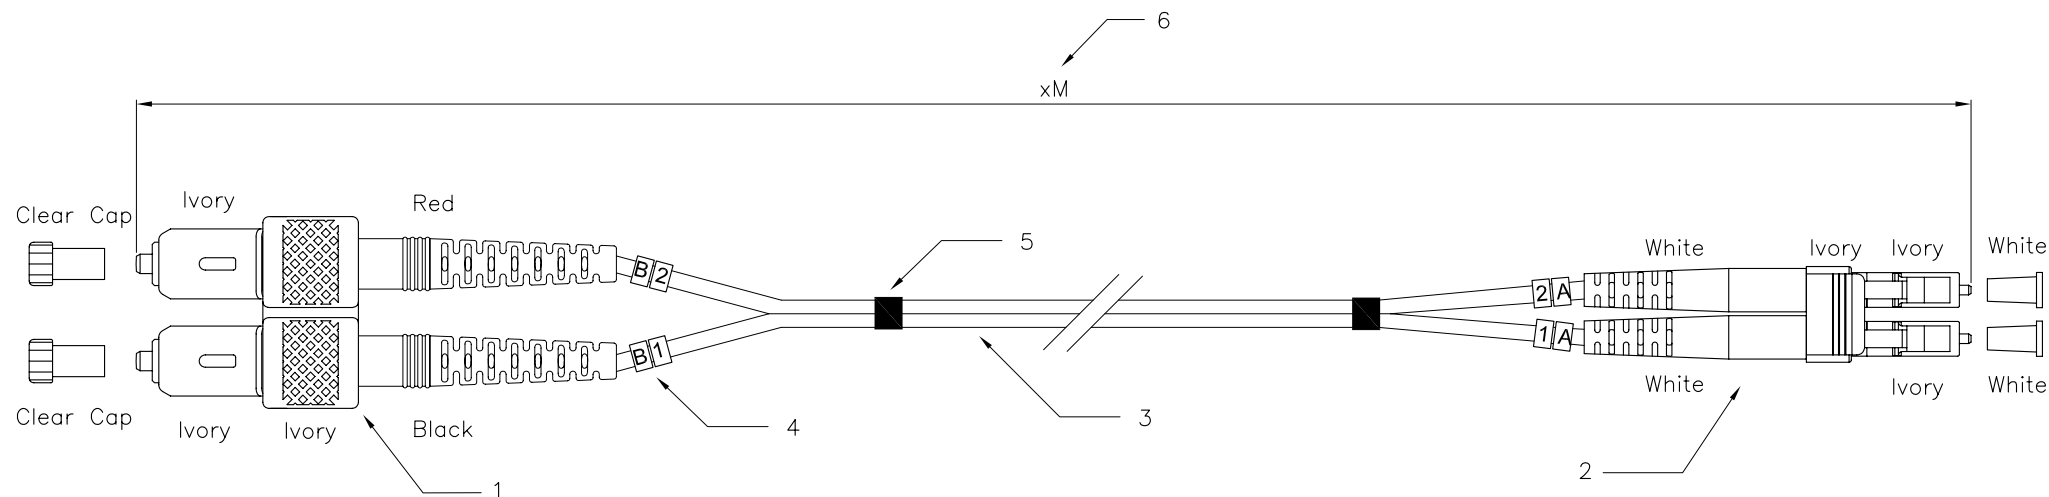

Specification:

- Connector Type : II SC/PC Multimode
- Connector Type : LC/PC Multimode
- Cable Type :
 - Zipcord cable, $\varnothing 3.0\text{mm}$, 50/125um Multimode
 - Calbe Jacket : Orange color, LSZH material
- Cable Marker
- Shrink Tube
- Length : xM

Performance:

- Insertion Loss : $< 0.5 \text{ dB}$
- Fiber Extention : $-0.05\text{um} < H < +0.05\text{um}$
- Ferrule End-face Radius : $7 < R < 25\text{mm}$
- Apex Offset : $< 50\text{um}$
- Increase in insertion loss after 500 mating : 0.2 dB Max.
- Operation Temperature : $-20^{\circ} \text{ to } +70^{\circ}$
- Storage Temperature : $-40^{\circ} \text{ to } +80^{\circ}$

RoHS Compliant

	DSGN	CSQ	31.MAY.2007	ITEM NO: 3182A
	CHK	Maer	31.MAY.2007	
	APPR	Yty	31.MAY.2007	SC to LC Duplex patch cord
	DWG NO: 3182A			

Videk Ltd